



Outdoor Station

1. IP65 - Rain cover for additional weather proof.
2. Wide angle camera 115°. 1.3MP.
3. Capacity: 200x IC card, 200x password.
4. Aluminum body + Acrylic plastic panel.
5. IR-CUT Night vision light.
6. Message leave when nobody answer.
7. Support SD card for snapshot/video.
8. App. tuya smart.
9. Power: POE charge

Flush mount size: 76*153*28mm

Optional: 7inch. color monitor



Tuya Smart IP Video Door Phone System with Mobile App Control

- DHCP for easy DIY, plug and play -




7inch WiFi Touch Screen Monitor (optional)

1. Memory function, extension 32G SD card.
Record&snapshot(SD card needed)
2. Smartphone app.& indoor monitor will get ring together.
3. Support ONVIF/rtsp IP Camera Intergration(H.264).
4. Alarm intergration
5. Easy plug & play , DHCP.
6. App. tuya smart.
7. Power: POE charge

Wall mount.

SPECIFICATIONS

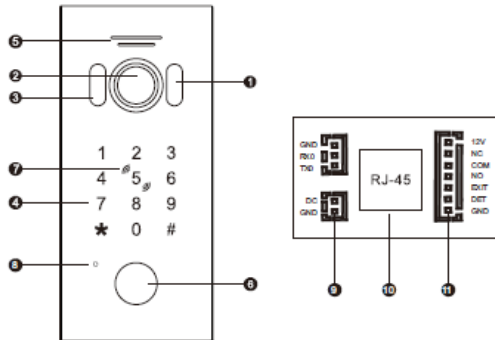

1	White light LED
2	Camera
3	Photosensitive resistance
4	Keypad
5	Speaker
6	Call button
7	Card area
8	Microphone
9	12V~15V DC in
10	RJ45 interface with PoE
11	Lock control

FUNCTIONS

This product function includes access control card RFID + access control controller + video and audio intercom, used in factories, homes, offices, banks and communities, etc.

- The product can directly access Tuya cloud through wireless or network cable. When used with indoor units, all indoor units will receive calls when outdoor calls (this product must be connected to a router with DHCP function enabled).
- The product includes keypad module and RFID module. The keypad module is used for the operation of the administrator mode. The RFID module is used to manage the operation of the user card.
- Fill lights and call button LED backlight have light-sensitive response functions. During the day, the white fill lights and button LED backlight will not light up. At night, the LED button light is always on; when calling at night, the fill light automatically turns on to fill light.

1. Add a device:

When the device starts, it will prompt its current mode is wired or wireless mode.

Wired mode: three didi beeps.

Wireless mode: seven didi beeps.

- Hang off (Back):** during a call or monitoring process, click this key to exit the current interface.
- Resolution:** tab to switch between HD and SD.
- Loudspeaker:** You can hear the sound of the outdoor when it is turned on, and you cannot hear it when it is turned off. During monitoring, you cannot talk, so this function is invalid during monitoring status.
- Full screen:** display the image in full screen
- Capture:** During a call or monitoring, click this button to capture the image of the current screen.

PARAMETERS


- View angle: 120°
- Resolution: 1.3MP
- Night vision: White light LED(120°)
- Working current; voltage: 12~15V DC input; PoE,
Working current standby \geq 150mA, Working \leq 300mA
- Working environment:
Working temperature: -20°C~ +50°C
Relative humidity: \leq 95%
- Lock control interface

NO.	PIN	Definition	Function	Remark
J1	1	NO_DC 12V (Brown)	E-lock power supply	Magnetic lock not supported
	2	NC(Orange)	Normal close	
	3	COM(Green)	Common	
	4	NO(Yellow)	Normal open	
	5	EXIT(Black)	Exit button	
	6	DET(White)	Door open status detection	
	7	GND(Red)	Ground	

NETWORK SETTING

Download App and register on it

- Please download the Tuya smart App on iOS system and Android system App store.
- Choose Tuya smart, and register a Tuya smart app account, please choose your country and region when registering.
- Log in Tuya smart App after registered.

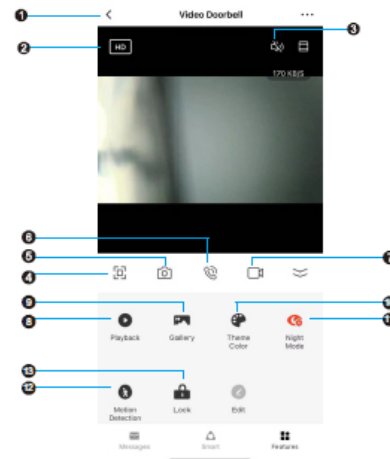

- Microphone:** When video doorbell call the mobile phone, after the mobile phone answers, click this button to turn on the microphone, the sound from the phone can be transmitted to the video doorbell. If it is not turned on, the video doorbell cannot hear the sound of the mobile phone.
- Record:** during a call or monitoring, click this button to record the current video.
- Playback:** When the video doorbell has an SD card and the record function on the APP is turned on, the video of each call or monitoring on the mobile phone can be viewed here. This feature is temporarily unavailable.